

MINIATURE ALUMINUM ELECTROLYTIC CAPACITORS


New



For Network, High Ripple, 12000 hours at 105°C
Series




- High reliability withstanding 12000 hours load life at 105°C
- For DC-DC convertor
- Complied to the RoHS directive

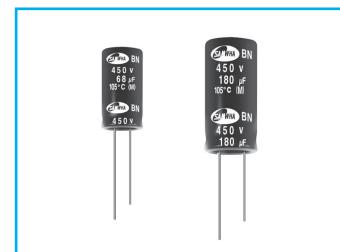

Item	Characteristics		
Operating temperature range	-40 ~ +105°C		
Leakage current max.	$I = 0.04CV + 100\mu A$ (after 1 minute) $I = 0.02CV + 25\mu A$ (after 5 minutes)		
Capacitance tolerance	$\pm 20\%$ at 120Hz, 20°C		
Dissipation factor max. (at 120Hz, 20°C)	WV	450, 500	
	$\tan\delta$	0.24	
Low temperature characteristics (Impedance ratio at 120Hz)	WV	450	500
	Z-25°C/Z+20°C	6	6
	Z-40°C/Z+20°C	6	11
Load life	After an application of DC bias voltage plus the rated AC ripple current for 12000 hours at 105°C. The measurement shall meet the following limits. The DC voltage plus the peak AC voltage combined must not exceed the rated voltage.		
	Leakage current	Less than specified value	
	Capacitance change	Within $\pm 30\%$ of initial value	
	$\tan\delta$	Less than 300% of specified value	
Shelf life (at 105°C)	After 1000 hours no load test, leakage current, capacitance and $\tan\delta$ are same as load life value. The measurement shall be performed at 20°C by the KS C IEC 60384 - 4		

● DRAWING

Unit : mm

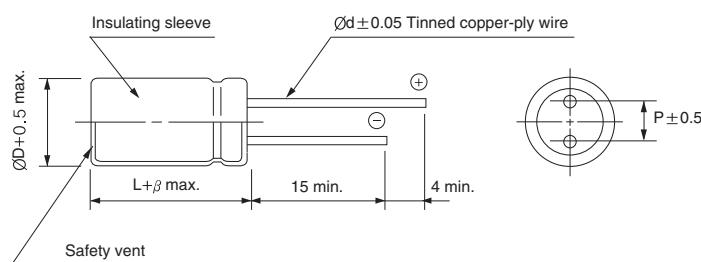

ØD	18
P	7.5
Ød	0.8
β	2.0
$L \leq 40mm$	2.0
$L \geq 40mm$	3.0

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

μF	WV	450		500	
		Case size $\text{ØD} \times L$ (mm)	Ripple current (mA rms) at 105°C, 100kHz	Case size $\text{ØD} \times L$ (mm)	Ripple current (mA rms) at 105°C, 100kHz
68		18 × 25	1500	18 × 31.5	1550
100		18 × 31.5	1700	18 × 40	1750
120		18 × 35.5	1900	18 × 45	1950
150		18 × 40	2000	18 × 50	2050
180		18 × 45	2180		

↑ Ripple current (mA rms) at 105°C, 100kHz
↑ Case size $\text{ØD} \times L$ (mm)

● FREQUENCY COEFFICIENT OF PERMISSIBLE RIPPLE CURRENT

μF	Frequency	120Hz	1kHz	10kHz	50kHz	100kHz \leq
450V, 500		0.50	0.80	0.90	0.95	1.00